

08/27/99
Jc490 U.S. PRO

Express Mail No.EJ735733080US

Patent

Jc490 U.S. PRO
08/27/99

Attorney's Docket No. NC28066

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of

Inventor(s): Janne Aaltonen
Ari Ikonen
Pekka Talmola

WARNING: Patent must be applied for in the name(s) of all of the actual inventor(s). 37 CFR 1.41(a) and 1.53(b).

For (title): Mobile Multimedia Terminal for DVB-T and Large and
Small Cell Communication

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date, August 27, 1999, in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number EJ735733080US, addressed to the: Assistant Commissioner for Patents, Washington, D.C. 20231.

Beverly French
(type or print name of person mailing paper)


Signature of person mailing paper

NOTE: Each paper or fee referred to as enclosed herein has the number of the "Express Mail" mailing label placed thereon prior to mailing. 37 CFR 1.10(b).

WARNING: Certificate of mailing (first class) or facsimile transmission procedures of 37 CFR 1.8 cannot be used to obtain a date of mailing or transmission for this correspondence.

1. Type of Application

This new application is for a(n)

(check one applicable item below)

☒ Original (nonprovisional)

☐ Design

☐ Plant

WARNING: Do not use this transmittal for a completion in the U.S. of an International Application under 35 U.S.C. 371(c)(4), unless the International Application is being filed as a divisional, continuation or continuation-in-part application

WARNING: Do not use this transmittal for the filing of a provisional application.

NOTE: If one of the following 3 items apply, then complete and attach **ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF A PRIOR U.S. APPLICATION CLAIMED** and a **NOTIFICATION IN PARENT APPLICATION OF THE FILING OF THIS CONTINUATION APPLICATION**.

☐ Divisional.

☐ Continuation.

☐ Continuation-in-part (C-I-P).

2. Benefit of Prior U.S. Application(s) (35. U.S.C. 119(e), 120, or 121)

NOTE: If the new application being transmitted is a divisional, continuation or a continuation-in-part of a parent case, or where the parent case is an International Application which designated the U.S., or benefit of a prior provisional application is claimed, then check the following item and complete and attach **ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED**.

WARNING: If an application claims the benefit of the filing date of an earlier filed application under 35 U.S.C. 120, 121 or 365(c), the 20-year term of that application will be based upon the filing date of the earliest U.S. application that the application makes reference to under 35 U.S.C. 120, 121 or 365(c). [35 U.S.C. 154(a)(2) does not take into account, for the determination of the patent term, any application on which priority is claimed under 35 U.S.C. 119, 365(a) or 365(b).] For a c-i-p application, applicant should review whether any claim in the patent that will issue is supported by an earlier application and, if not, the applicant should consider canceling the reference to the earlier filed application. The term of a patent is not based on a claim-by-claim approach. See Notice of April 14, 1995, 60 Fed. Reg. 20,195, at 20,205.

WARNING: When the last day of pendency of a provisional application falls on a Saturday, Sunday, or Federal holiday within the District of Columbia, any nonprovisional application claiming benefit of the provisional application must be filed prior to the Saturday, Sunday, or Federal holiday within the District of Columbia. See 37 C.F.R. § 1.78(a)(3).

☐ The new application being transmitted claims the benefit of prior U.S. application(s). Enclosed are **ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED**.

3. Papers Enclosed That Are Required for Filing Date under 37 C.F.R. 1.53(b) (Regular) or 37 C.F.R. 1.153 (Design) Application

16 Pages of specification

9 Pages of claims

1 Page of Abstract

4 Sheets of drawing

☐ formal

☒ informal

WARNING: *DO NOT* submit original drawings. A high quality copy of the drawings should be supplied when filing a patent application. The drawings that are submitted to the Office must be on strong, white, smooth, and non-shiny paper and meet the standards according to § 1.84. If corrections to the drawings are necessary, they should be made to the original drawing and a high-quality copy of the corrected original drawing then submitted to the Office. Only one copy is required or desired. Comments on proposed new 37 CFR 1.84. Notice of March 9, 1988 (1990 O.G. 57-62).

NOTE "Identifying indicia, if provided, should include the application number or the title of the invention, inventor's name, docket number (if any), and the name and telephone number of a person to call if the Office is unable to match the drawings to the proper application. This information should be placed on the back of each sheet of drawing a minimum distance of 1.5 cm (5/8 inch) down from the top of the page." 37 C.F.R. 1.84(c).

(complete the following, if applicable)

- ☐ The enclosed drawing(s) are photograph(s), and there is also attached a "PETITION TO ACCEPT PHOTOGRAPH(S) AS DRAWING(S)." 37 C.F.R. 1.84(b).

4. Additional papers enclosed

- ☐ Preliminary Amendment
- ☐ Information Disclosure Statement (37 C.F.R. 1.98)
- ☐ Form PTO-1449
- ☐ Citations
- ☐ Declaration of Biological Deposit
- ☐ Submission of "Sequence Listing," computer readable copy and/or amendment pertaining thereto for biotechnology invention containing nucleotide and/or amino acid sequence.
- ☐ Authorization of Attorney(s) to Accept and Follow Instructions from Representative
- ☐ Special Comments
- ☐ Other

5. Declaration or oath

- ☐ Enclosed
- Executed by

(check all applicable boxes)

- ☐ inventor(s).
- ☐ legal representative of inventor(s). 37 CFR 1.42 or 1.43.
- ☐ joint inventor or person showing a proprietary interest on behalf of inventor who refused to sign or cannot be reached.
- ☐ This is the petition required by 37 CFR 1.47 and the statement required by 37 CFR 1.47 is also attached. See item 13 below for fee.

- ☒ Not Enclosed.

WARNING: Where the filing is a completion in the U.S. of an International Application, but where a declaration is not available, or where the completion of the U.S. application contains subject matter in addition to the International Application, the application may be treated as a continuation or continuation-in-part, as the case may be, utilizing ADDED PAGE FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION CLAIMED.

- ☐ Application is made by a person authorized under 37 CFR 1.41(c) on behalf of **all** the above named inventor(s).

[The declaration or oath, along with the surcharge required by 37 CFR 1.16(e) can be filed subsequently.]

NOTE: It is important that all the correct inventor(s) are named for filing under 37 CFR 1.41(c) and 1.53(b).

- ☐ Showing that the filing is authorized.
[not required unless called in question. 37 CFR 1.41(d)]

6. Inventorship Statement

WARNING: If the named inventors are each not the inventors of all the claims an explanation, including the ownership of the various claims at the time the last claimed invention was made, should be submitted.

The inventorship for all the claims in this application are:

- ☐ The same.

or

- ☐ Not the same. An explanation, including the ownership of the various claims at the time the last claimed invention was made,
☐ is submitted.
☐ will be submitted.

7. Language

NOTE: An application including a signed oath or declaration may be filed in a language other than English. A verified English translation of the non-English language application and the processing fee of \$130.00 required by 37 CFR 1.17(k) is required to be filed with the application, or within such time as may be set by the Office. 37 CFR 1.52(d).

NOTE: A non-English oath or declaration in the form provided or approved by the PTO need not be translated. 37 CFR 1.69(b).

- ☒ English
☐ Non-English
☐ The attached translation is a verified translation. 37 CFR 1.52(d).

8. Assignment

- ☐ An assignment of the invention to Nokia Mobile Phones Limited
☐ is attached. A separate ☐ "COVER SHEET FOR ASSIGNMENT (DOCUMENT) ACCOMPANYING NEW PATENT APPLICATION" or ☐ FORM PTO 1595 is also attached.
☒ will follow.

NOTE: "If an assignment is submitted with a new application, send two separate letters—one for the application and one for the assignment." Notice of May 4, 1990 (1114 O.G. 77-78).

WARNING: A newly executed "CERTIFICATE UNDER 37 CFR 3.73(b)" must be filed when a continuation-in-part application is filed by an assignee. Notice of April 30, 1993, 1150 O.G. 62-64.

- B. ☐ Design application
[\$310.00—37 CFR 1.16(f)]

Filing Fee Calculation \$

- C. ☐ Plant application
[\$480.00—37 CFR 1.16(g)]

Filing Fee Calculation \$

11. Small Entity Statement(s)

- ☐ Verified Statement(s) that this is a filing by a small entity under 37 CFR 1.9 and 1.27 is (are) attached.

WARNING: *Status as a small entity in one application or patent does not affect any other application or patent, including applications or patents which are directly or indirectly dependent upon the application or patent in which the status has been established. A nonprovisional application claiming benefit under 35 U.S.C. 119(e), 120, 121 or 365(c) of a prior application may rely on a verified statement filed in the prior application if the nonprovisional application includes a reference to a verified statement in the prior application or includes a copy of the verified statement filed in the prior application if status as a small entity is still proper and desired." 37 C.F.R. § 1.28(a).

(complete the following, if applicable)

- ☐ Status as a small entity was claimed in prior application.
_____/_____, was filed on _____, from which
benefit is being claimed for this application under:
35 U.S.C. ☐ 119(e),
☐ 120,
☐ 121,
☐ 365(c),
and which status as a small entity is still proper and desired.

- ☐ A copy of the verified statement in the prior application is included.
Filing Fee Calculation (50% of A, B or C above)
\$ _____

NOTE: Any excess of the full fee paid will be refunded if a verified statement and a refund request are filed within 2 months of the date of timely payment of a full fee. The two-month period is not extendible under § 1.136, 37 CFR 1.28(a).

12. Request for International-Type Search [37 C.F.R. 1.104(d)]

(complete, if applicable)

- ☐ Please prepare an international-type search report for this application at the time when national examination on the merits takes place.

9. Certified Copy

Certified copy(ies) of application(s)

Country	Appln. no.	Filed
Country	Appln. no.	Filed
Country	Appln. no.	Filed

from which priority is claimed

- ☐ is (are) attached.
☐ will follow.

NOTE: The foreign application forming the basis for the claim for priority must be referred to in the oath or declaration. 37 CFR 1.55(a) and 1.63.

NOTE: This item is for any foreign priority for which the application being filed directly relates. If any parent U.S. application or International Application from which this application claims benefit under 35 U.S.C. 120 is itself entitled to priority from a prior foreign application, then complete item 18 on the ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.

10. Fee Calculation (37 C.F.R. 1.16)

A. ☒ Regular application

CLAIMS AS FILED			
Number Filed	Number Extra	Rate	Basic Fee
			37 C.F.R. 1.16(a)
			\$760.00
Total Claims			
[37 CFR 1.16(c)] 44-20 = 24	24	x \$18.00	432.00
Independent Claims [37 CFR 1.16(b)]			
3-3 = 0	0	x \$78.00	0
Multiple dependent claim(s), if any			
[37 CFR 1.16(d)]	0	+ \$260.00	0

- ☐ Amendment cancelling extra claims is enclosed.
☐ Amendment deleting multiple-dependencies is enclosed.
☐ Fee for extra claims is not being paid at this time.

NOTE: If the fees for extra claims are not paid on filing they must be paid or the claims cancelled by amendment, prior to the expiration of the time period set for response by the Patent and Trademark Office in any notice of fee deficiency. 37 CFR 1.16(d).

Filing Fee Calculation

\$1192.00

13. Fee Payment Being Made at This Time

- ☐ Not Enclosed
- ☐ No filing fee is to be paid at this time.
(This and the surcharge required by 37 C.F.R. 1.16(e) can be paid subsequently).
- ☒ Enclosed
- | | |
|--|-----------|
| <input checked="" type="checkbox"/> Filing fee | \$1192.00 |
| <input type="checkbox"/> Recording assignment
[\$40.00; 37 C.F.R. 1.21(h)]
(See attached "COVER SHEET FOR ASSIGNMENT
ACCOMPANYING NEW APPLICATION"). | _____ |
| <input type="checkbox"/> Petition fee for filing by other than all the inventors or
person on behalf of the inventor where inventor refused
to sign or cannot be reached
[\$130.00; 37 C.F.R. 1.47 and 1.17(h)] | _____ |
| <input type="checkbox"/> For processing an application with a specification
in a non-English language
[\$130.00; 37 C.F.R. 1.52(d) and 1.17(k)] | _____ |
| <input type="checkbox"/> Processing and retention fee
[\$130.00; 37 C.F.R. 1.53(d) and 1.21(l)] | _____ |
| <input type="checkbox"/> Fee for international-type search report
[\$40.00; 37 C.F.R. 1.21(e)] | _____ |

NOTE: 37 CFR 1.21(l) establishes a fee for processing and retaining any application that is abandoned for failing to complete the application pursuant to 37 CFR 1.53(d) and this, as well as the changes to 37 CFR 1.53 and 1.78, indicates that in order to obtain the benefit of a prior U.S. application, either the basic filing fee must be paid, or the processing and retention fee of § 1.21(l) must be paid, within 1 year from notification under § 53(d).

Total fees enclosed _____

14. Method of Payment of Fees

- ☐ Check in the amount of \$ _____
- ☒ Charge Account No. 50-0270 in the amount of \$1192.00

Two duplicates of this transmittal are attached.

NOTE: Fees should be itemized in such a manner that it is clear for which purpose the fees are paid. 37 CFR 1.22(b).

15. Authorization to Charge Additional Fees

WARNING: If no fees are to be paid on filing, the following items should not be completed

WARNING: Accurately count claims, especially multiple dependent claims, to avoid unexpected high charges, if extra claim charges are authorized

- ☒ The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. 50-0270.

☒ 37 C.F.R. 1.16(a), (f) or (g) (filing fees)

☒ 37 C.F.R. 1.16(b), (c) and (d) (presentation of extra claims)

NOTE: *Because additional fee for excess or multiple dependent claims not paid on filing or on later presentation must only be paid or these claims cancelled by amendment prior to the expiration of the time period set for response by the PTO in any notice of fee deficiency [37 CFR 1.16(d)], it might be best not to authorize the PTO to charge additional claim fees, except possibly when dealing with amendments after final action.*

☒ 37 C.F.R. 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)

☒ 37 C.F.R. 1.17 (application processing fees)

WARNING: While 37 CFR 1.17(a), (b), (c) and (d) deal with extensions of time under § 1.136(a), this authorization should be made only with the knowledge that: "Submission of the appropriate extension fee under 37 C.F.R. 1.136(a) is to no avail unless a request or petition for extension is filed " (Emphasis added). Notice of November 5, 1985 (1060 O.G. 27).

☐ 37 C.F.R. 1.18 (issue fee at or before mailing of Notice of Allowance, pursuant to 37 C.F.R. 1.311(b))

NOTE: *Where an authorization to charge the issue fee to a deposit account has been filed before the mailing of a Notice of Allowance, the issue fee will be automatically charged to the deposit account at the time of mailing the notice of allowance. 37 CFR 1.311(b).*

NOTE: *37 CFR 1.28(b) requires "Notification of any change in loss of entitlement to small entity status must be filed in the application...prior to paying, or at the time of paying,...issue fee " From the wording of 37 CFR 1.28(b): (a) notification of change of status must be made even if the fee is paid as "other than a small entity" and (b) no notification is required if the change is to another small entity.*


16. Instructions as to Overpayment

☒ Credit Account No. 50-0270.

☐ Refund

Reg. No. P44,873

Tel. No. (972) 894-4244

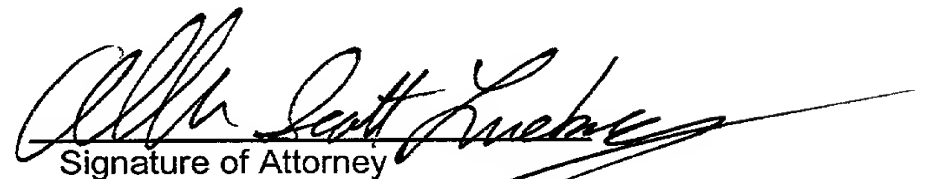
Signature of Attorney

Allen Scott Lineberry
(type or print name of attorney)

Nokia Inc.

6000 Connection Drive
(P.O. Address)

Irving, TX 75039

☐ **Incorporation by reference of added pages**

[check the following item if the application in this transmittal claims the benefit of prior U.S. application(s) (including an International Application entering the U.S. stage as a continuation, divisional or C-I-P application) and complete and attach the ADDED PAGES FOR NEW APPLICATION TRANSMITTAL WHERE BENEFIT OF PRIOR U.S. APPLICATION(S) CLAIMED.]

- ☐ Plus Added Pages for New Application Transmittal Where Benefit of Prior U.S. Application(s) Claimed

Number of pages added _____

- ☐ Plus Added Pages for Paper Referred to in Item 4 Above

Number of pages added _____

- ☐ Plus "Assignment Cover Letter Accompanying New Application"

Number of pages added _____

☒ **Statement Where No Further Pages Added**

(if no further pages form a part of this Transmittal, then end this transmittal with this page and check the following item)

- ☒ This transmittal ends with this page.

Mobile Multimedia Terminal For DVB-T and Large and Small Cell Communication

U.S. Patent Application of:

Janne Aaltonen,	Inventor
Ari Ikonen,	Inventor
Pekka Talmola,	Inventor

<u>Nokia Mobile Phones, Ltd.,</u>	Assignee
-----------------------------------	----------

Attorney's Docket No.: NC-28066
ALLEN SCOTT LINEBERRY, PROV. REG. PAT. ATTY.

Attorney Work Product – Privileged and Confidential

Mobile Multimedia Terminal for DVB-T

And

Large and Small Cell Communication

5 **Field of the Invention**

This invention relates to multimedia terminals and, more particularly, to interactive multimedia terminals using DVB in a mobile environment.

Background of the Invention

10 The explosion of wireless data communication has been fueled by advances in semiconductor technology and software. These advances have allowed audio and data signals to be transmitted over digital networks.

15 Digital and mixed signal systems offer many advantages over old-fashioned analog systems. One important advantage is the ability of digital systems to transmit and receive more information at higher rates. Whereas analog systems are limited to transmitting audio and video at a rate of 64 Kbps, digital systems can compress such transmissions to transmit eight times as much information at the same rate. Moreover, faster processors have allowed digital systems to transmit bits at ever increasing rates. By taking advantage of
20 the compression routines and faster processors to transmit information more accurately and at higher rates, significant savings have been realized in both switching capacity and ongoing line costs.

25 Additional advantages have been realized through the use of multiple access techniques such as Time Division Multiple Access ("TDMA") and Code Division Multiple Access ("CDMA"). These techniques allow for multiple users to access a single bandwidth. They also allow for audio and data signals

transmitted by a single user to be intermingled. These techniques make better use of scarce airwave space.

5 A recent development in the wireless information revolution has been the transmission of digital video signals over the airwaves, for example, using DVB-T. A similar development is occurring in the RF band, as efforts are being made to add video capability to cellular telephones, fax machines and computers. Before quality video capability can be added to these machines, however, a problem arising from bandwidth limitation must be overcome. Because these machines operate on frequencies between 900 and 1900 Mhz, the bandwidth is not wide enough to transmit the enormous amount of video and audio information that is required for quality motion pictures.

10
15 Digital television provides more channels at a higher quality than is currently available with analog broadcasts. One analog channel provides the bandwidth capacity for one high-definition (HDTV) digital broadcast or several standard definition (SDTV) digital broadcasts. Digital television is scalable between these two extremes. Therefore, digital broadcasters can make a trade-off between vastly improved image and sound quality and an increased number of programming choices.

20 Digital television is deliverable to moving receivers. Currently, analog television reception is non-existent or severally limited in moving receivers. However, digital receivers allow for clear reception in cars, buses, trains, and in handheld television sets such as the Sony Watchman™.

25 Most of the equipment used to create, edit, and distribute television programs is now digital. The analog reception of a television signal, via cable, aerial, or satellite, is the end result of a long chain of events, most of which have taken place in the digital domain. For example, in delivering a new broadcast, the field reporter uses digital satellite news gathering equipment to

uplink her report to a programming center. The material is digitally received, decoded, and compiled with live program feeds in a studio. The broadcast is then sent digitally around the world to professional receivers. Finally, the broadcast is converted to an analog signal and sent to the end viewer.

5

An intelligent TV can receive communication services by connecting a TV to a value added network (VAN). The intelligent TV includes an information signal processing unit for receiving information communication data (hereinafter, "information data") when the intelligent TV is connected to the VAN, and for generating information RGB signals, and switching control signals in order to display the information data on a screen. The intelligent TV selects and displays on the screen one of the information data signals processed in the information signal processing unit and a TV RGB signal processed in a TV signal processing unit, in accordance with the switching control signal output from the information signal processing unit. Intelligent TV makes it possible to view, through a TV screen, several communication services, such as stock quotes, news services, weather reports, and TV program lists, being transmitted through the VANs. Therefore, it has an advantage that persons who are not familiar with the usage of a computer can easily receive communication services.

20

Even though intelligent TV has the advantage of receiving communication services through the TV screen, it cannot display multiple signals at the same time. Information signals for displaying information data on a screen, a TV signal, a Picture-In-Picture (PIP) signal for enabling two screens to be viewed simultaneously, and a TV on-screen-display (OSD) signal must be displayed one at a time. Therefore, signals are displayed according to a predetermined priority. For example, an information signal is displayed

25

preferentially over a TV signal, a PIP signal is displayed preferentially over an information signal, and a TV OSD signal is displayed preferentially over a PIP signal.

Current information delivery services described above lack many features that would enhance their usability and desirability by the public. As mentioned, the intelligent TV lacks an ability to display multiple signals simultaneously. In addition, an online connection of two delivery services with one of the services being, for example, an interactive application, is not available. Current technologies are dependent on stationary receivers. Since multiple signals cannot be integrated by the integrated receiver/decoder (or IRD), information delivery is dependent on the location or site.

New display technologies provide the possibility to build low power and high quality portable display devices. These devices are based on large full color flat panel displays or on virtual (helmet mount) displays. The common denominator for these kinds of displays is that they are digital and matrix type displays. Introduction of DVB-T enables, for the first time in TV broadcast history, the possibility of truly mobile reception of TV. In addition to conventional TV services, DVB-T provides access to broadcast data services. Integration of DVB-T with digital display unit, such as the flat panel or helmet mount displays described above, makes it possible to build fully digital TV receiver with studio quality picture.

Figure 3 depicts a block diagram of the current multimedia architecture. Currently, the digital set-top-box (STB) **302** and digital TV display **304** are separate. Furthermore, the STB 302 communication link is only of a single type. For example, the STB communications link is a hard interface such as coax-cable or POTS. Therefore, the typical digital TV 304 connected to an STB 302 offers no portability or mobility.

Laptop and notebook computers are now equipped with the means to connect to networks using a mobile (or wireless) link. Such connections usually utilize a modem and digital wireless transceiver built on a single card, e.g., a PCMCIA card. However, digital TV receivers have not been integrated into such devices. One reason for this lack of versatility is that digital TV receivers have high power consumption rates (relative to other laptop or notebook functions). Thus, the battery power of a laptop would be consumed rapidly. In addition, laptops, like STBs, are typically limited in their ability to communicate externally. For example, a serial port, parallel port and possibly a modem can be used to distribute information from a laptop. However, such devices do not switch between these links seamlessly. Further, such devices do not have the ability to take stock of their environment and dynamically switch to the most appropriate communication link.

Summary of the Invention

The disclosed embodiments provide a method and apparatus for providing an interactive mobile multimedia terminal. The mobile multimedia terminal (or MMT) allows for wideband data stream reception using a digital data broadcast receiver such as DVB-T. Interactivity is realized with built-in local or large cell size communications link. The local link could be WLAN or Bluetooth (a low-power RF transceiver). The large cell size communications link could be a mobile station link e.g., GSM, CDMA, TDMA, etc. A mobile station with a Bluetooth link can be used as an IP router or a portable base station for large cell size communication if no local connection point is found. The MMT integrates DVB-T reception, digital display, and communications links together to provide interactivity in a mobile environment. The MMT communications link with a mobile station enables it to act as an extended

display for the mobile station. The MMT can also act as a graphical interface for SMS messaging via the mobile station or manipulating other applications on the mobile station.

The disclosed embodiments can provide several advantages. For example, the MMT is a single device that can be used in a portable or mobile environment. The MMT is configured with different wireless links, enabling it to adapt seamlessly and dynamically to its communications environment by switching between different communications interfaces, protocols, or links. For another example, the MMT can be used to receive and display (or broadcast) different kind of data. Such data can include, for example, digital content *e.g.*, MP3 files, e-books, or newspapers, e-commerce data, or broadcast TV. For another example, the timing and synchronization manager can be used to save power by controlling the digital receiver of the MMT.

Brief Description of the Drawings

The disclosed inventions will be described with reference to the accompanying drawings, which show important sample embodiments of the invention and which are incorporated in the specification hereof by reference, wherein:

Figure 1 depicts the presently preferred embodiment of the mobile multimedia terminal;

Figure 2 depicts the presently preferred embodiment of a MMT and its corresponding communications environment;

Figure 3 depicts a block diagram of the current multimedia architecture; and

Figure 4 depicts a block diagram of a mobile station **400** that can act as an IP router or portable base station to the MMT 100.

Detailed Description of the Preferred Embodiments

The numerous innovative teachings of the present application will be described with particular reference to the presently preferred embodiment. However, it should be understood that this class of embodiments provides only a few examples of the many advantageous uses of the innovative teachings herein. In general, statements made in the specification of the present application do not necessarily delimit any of the various claimed inventions. Moreover, some statements may apply to some inventive features but not to others.

Figure 1 depicts the presently preferred embodiment of the mobile multimedia terminal (or MMT). The MMT provides an interactive, mobile environment. In the presently preferred embodiment, a DVB-T receiver **102** is controlled by a CPU **104**. The DVB-T receiver 102 is capable of receiving digital TV broadcasts according to the DVB-T standard. DVB-S (satellite) and DVB-C (cable) broadcasts are also standardized and may be used. The DVB-T standard specifies a broadband channel, preferably in the VHF frequency range, that carries a digital data stream. In addition to TV broadcasts, channels in the DVB-T spectrum can be used to transmit data intended for receipt by specific users. Such data is generally encrypted for privacy. In this manner, DVB-T (or DVB-S or DVB-C) can be used for data transmission which requires a wideband downstream channel (from the source to the requestor). In the presently preferred embodiment, the MMT **100** is the requestor.

A media decoder **106** is controlled by the CPU **104** and used to decode the received DVB-T broadcast. The DVB-T broadcast standard uses MPEG-2 encoding. Therefore, in the presently preferred embodiment, the media decoder 106 is an MPEG-2 decoder. However, other forms of streaming video can and do use alternate protocols to transmit digital data. The media decoder 106

selected should be designed to match and decode the transmission protocol used by the digital data source.

5 A display interface **108** receives the decoded broadcast from the media decoder 106. The display interface 108 is designed to optimize the display of data to a user of the MMT 100. For example, the digital data received can be in the form of full motion video or it can be a graphic of some kind. The differing formats require differing modes to be optimally displayed. The display interface 108 acts as a video integrator. For example, the display interface can place a graphics overlay onto full motion video, manipulate the display of full motion video into a certain part of a display, or crop some video or graphics to show only their essential or moving parts on a display. The output of the display interface 108 drives a display **110** for the MMT 100.

10 In addition to processing a digital broadcast signal, the MMT 100 of the presently preferred embodiment is capable of transmitting information. Such information can include requests for information, data to be downloaded via digital broadcast, phone identification data, or regular voice and data communications over a mobile station (such as a mobile phone). In the presently preferred embodiment, the MMT 100 is equipped with a low-power radio frequency (LPRF) e.g., Bluetooth, transceiver **112**. A transceiver configured according to the Bluetooth standard is capable of short range (approximately 10 meters) radio communication to a local transceiver. The local transceiver can be connected to a LAN, PSTN, or a low or high power wireless network. In addition to a LPRF link, the MMT 100 of the presently preferred embodiment can be configured with a Wireless-LAN **114** or cellular transceiver **116**. The cellular transceiver can be, for example, a GSM, TDMA, CDMA, AMPS, or other standard or proprietary communications protocol. The CPU controller 104 of the MMT 100 is configured to select the mode of

communication between transceivers 112, 114, and 116 dynamically. The CPU 104 can select the appropriate communications link according to the current communications environment. For example, if a Bluetooth transceiver is detected, data can be exchanged using the Bluetooth transceiver 112 without the need for acquiring a channel on a cellular link. However, if voice data is to be transmitted, a cellular link would be desirable. Thus the CPU 104 would select the cellular transceiver 106 for transmission duties.

The LPRF link 112 of the MMT 100 can be used in conjunction with an external mobile station. The external mobile station can act as a portable (close range) base station. The external mobile station can also act as an IP router for web browsing and other network activities.

The DVB-T receiver 102 of the MMT 100 is activated or deactivated by the CPU 104. The DVB-T receiver 102 can be activated at user request. That is, when the user wishes to receive broadcast data or is expecting to receive broadcast data. The CPU 104 can also monitor the environment for service information and activate the DVB-T receiver 102 if conditions warrant it. For example, if services the user wishes to receive are detected, the CPU 104 can activate the DVB-T receiver 102. As another example, the CPU 104 can activate the DVB-T receiver 102 if and when it needs to, in order to impart important or timely data to the user, *e.g.*, weather or news data.

In the presently preferred embodiment, the DVB-T receiver 102 is equipped with a timing element **118** enabling it to remain synchronous with the digital broadcast facility. This timer 118 makes it possible to switch on the receiver and pick up the selected data packets days after the last system synchronization. The timer 118 allows the CPU 104 to control activation of the DVB-T receiver 102 also enables power savings. For example, if video functionality is not currently in use, that is, digital broadcasts are not being or

do not need to be received, the DVB-T receiver 102 is switched off by the CPU 104. Such a situation can occur when, for example, the MMT is web browsing over a communications link 112, 114, or 116.

Figure 2 depicts the presently preferred embodiment of a MMT 100 and its corresponding communications environment **200**. Media is provided by a service provider **202**. Media can include, for example, data services, decryption keys for smart cards, digital TV, digital audio, or other digital data. The media can be provided on the request by user or under a “broadcast” principle. In the presently preferred embodiment specific requests for data are handled via a mobile station **204** equipped with an LPRF transceiver. The requests are transmitted via an LPRF link from the MMT 100 to the mobile station 204. The mobile station 204 relays the request via a wireless operator **206**. The service provider 202 capable of providing the requested data receives the request from the wireless operator 206. The media content is routed from the service provider 202, via DVB-scrambling **210**, to a DVB Network operator **212**. The DVB Network operator 212 multiplexes the media content with free to air TV Services **214** and transports the data over a DVB broadcast channel **208**.

At the MMT 100, the DVB-T transmission is received by the DVB-T receiver 102. A front end receiver **216** in the DVB-T receiver 102 receives the transmission, acting as the over-the-air interface of the receiver 102. Data is transmitted to a descrambler **218** with a smart card **220**. The descrambler 218 is optional in the presently preferred embodiment. The decrypted/descrambled data is then forwarded to a demultiplexer **222**.

The front end 216, descrambler 218, smart card 220, and demultiplexer 222 consume a majority of the power used by the DVB receiver 102. Data for

the demultiplexer 222 is routed to the media decoder 106. Alternatively, the data can be routed to buffer or storage memory 224 or an optional memory card 226. Storing the data instead of decoding and displaying it is dependent on the set up and usage of the DVB-T receiver 102. For example, by storing data into memory, it is possible to display one data stream while receiving another. In the presently preferred embodiment, the timing and synchronization manager 118 controls the front end 216, descrambler 218, smart card 220, and demultiplexer 222. The timing and synchronization manager 118 activates these receiver components only when needed or upon user request. The CPU 104 of the MMT 100 controls all of the components of the MMT. The CPU 104 is responsible for reading the service information and determining the communication environment of the MMT 100. The CPU 104 is used to configure the timing and synchronization manager 118.

Content to be shown on the display 110 of the MMT 100 can originate either from CPU 104 via memory 224 or 226 or from media decoder 106. The display of the MMT 100 can be, for example, a flat panel TFT display or a virtual display such as a head mounted LCOS 3D display. Display data is processed by the display interface 108 of the MMT. This interface 108 performs the needed operations of scaling, zooming, frame rate conversions, filtering, in order to appropriately display the data on the display 110 of the MMT 100. The display interface 108 can be configured to optimally display data depending on its type and the type of display 110 to be utilized.

Digital content can also include audio signals. Such content can be presented through the audio output 230 of the MMT 100. The audio output 230 of the MMT can be, *e.g.*, speakers.

The MMT 100 can be configured to communicate in a variety of ways. For example, an LPRF link 112 can be used to communicate with a mobile

station acting as a portable base station or IP router. For another example, in a home gateway environment, the MMT 100 can act as a node in a Wireless LAN using a WLAN transceiver 114.

5 **Figure 4** depicts a block diagram of a mobile station **400** that can act as an IP router or portable base station to the MMT 100. The mobile station 400 includes, in this example:

10 A control head **402** containing an audio interface, i.e. a speaker **404** and microphone **406**. The control head 402 generally includes a display assembly **408** allowing a user to see dialed digits, stored information, messages, calling status information, including signal strength, etc. The control head generally includes a keypad **410**, or other user control device, allowing a user to dial numbers, answer incoming calls, enter stored information, and perform other mobile station functions. The control head also has a controller unit **434** that
15 interfaces with a logic control assembly **418** responsible, from the control unit perspective, for receiving commands from the keypad 410 or other control devices, and providing status information, alerts, and other information to the display assembly 408;

20 A transceiver unit **412** containing a transmitter unit **414**, a receiver unit **416**, and the logic control assembly 418. The transmitter unit 414 converts low-level audio signals from the microphone 406 to digital coding using a codec (a data coder/decoder) **420**. The digitally encoded audio is represented by modulated shifts, for example, in the frequency domain, using a shift key modulator/demodulator **422**. Other codes transmission utilized by the logic
25 control assembly 418, such as station parameters and control information, may also be encoded for transmission. The modulated signal is then amplified **424** and transmitted via an antenna assembly **426**;

5 The antenna assembly 426 contains a TR (transmitter/receiver) switch
436 to prevent simultaneous reception and transmission of a signal by the
mobile station 400. The transceiver unit 412 is connected to the antenna
assembly 426 through the TR switch 436. The antenna assembly contains at
least one antenna 438;

10 The receiver unit 416 receives a transmitted signal via the antenna
assembly 426. The signal is amplified 424 and demodulated 422. If the signal
is an audio signal, it is decoded using the codec 420. The audio signal is then
reproduced by the speaker 404. Other signals are handled by the logic control
assembly 418 after demodulation 422; and

15 A logic control assembly 418 usually containing an application specific
integrated circuit (or ASIC) combining many functions, such as a general
purpose microprocessor, digital signal processor, and other functions, into one
integrated circuit. The logic control assembly 418 coordinates the overall
operation of the transmitter and receiver using control messages. The various
disclosed embodiments make use of the logic control assembly to control
scanning and evaluation of other base stations. Generally, the logic control
assembly operates from a program that is stored in flash memory 428 of the
mobile station. Flash memory 428 allows upgrading of operating software,
20 software correction or addition of new features. Flash memory 428 is also used
to hold user information such as speed dialing names and stored numbers.

25 In addition to flash memory 428, the mobile station will typically contain
read only memory (ROM) 430 for storing information that should not change,
such as startup procedures, and random access memory (RAM) 432 to hold
temporary information such as channel number and system identifier.

In the presently preferred embodiment, the mobile station also includes an LPRF transceiver 112, *e.g.*, Bluetooth, for communication with the MMT 100.

5 **Modifications and Variations**

As will be recognized by those skilled in the art, the innovative concepts described in the present application can be modified and varied over a tremendous range of applications, and accordingly the scope of patented subject matter is not limited by any of the specific exemplary teachings given.

10 For example, the digital receiver is described as a DVB-T receiver. However, the digital data received could be in any of a variety of digital formats, frequencies, protocols, etc. The digital receiver used should be configured to receive the types of data expected. Moreover, the digital receiver could be configured to receive digital information in a variety of formats or
15 receive analog *e.g.*, NTSC or PAL, and digital broadcasts.

For another example, the presently preferred embodiment is described as having only one digital receiver. However, differing embodiments of the MMT may be configured with multiple digital receivers. The use of more than one digital receiver can serve to increase the robustness of the data received in
20 digital broadcast.

For another example, the presently preferred embodiment is described as operating over differing communications links, one at a time. However, it is possible that several of the communications links, *e.g.*, LPRF, WLAN, and/or a wireless mobile station link can be operated at once to send and receive
25 information to multiple places simultaneously.

For another example, while not stated explicitly in the presently preferred embodiment, it is possible to integrate a mobile station into the MMT. An

integrated MMT/mobile station would allow the MMT to function as its own IP router or portable base station.

For another example, digital broadcast of data is anticipated in the presently preferred embodiment. However, it is possible that third generation (3G) or greater cellular networks will have the capacity to deliver TV reception and broadband data transmission. The MMT can be equipped with a different or alternate receiver which is configured to receive such digital data.

5

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
221

Claims

What is claimed is:

- 1 1. A method of mobile multimedia terminal interactivity, comprising the steps
2 of:
3 requesting information from a digital service provider;
4 receiving a data signal from said digital service provider over the air;
5 decoding said data signal for presentation;
6 optimizing said data signal for output; and
7 presenting said optimized signal as output.
- 1 2. The method of Claim 1, wherein said requesting step uses one of a plurality
2 of wireless communications links.
- 1 3. The method of Claim 1, wherein said requesting step uses one of a plurality
2 of wireless communications links and a controller determines the
3 appropriate communications link.
- 1 4. The method of Claim 1, further comprising the step of storing said data
2 signal.
- 1 5. The method of Claim 1, wherein said optimizing step further comprises the
2 step of manipulating the data signal for display.

1 6. The method of Claim 1, wherein said optimizing step further comprises the
2 step of combining said data signal with other data to create a
3 display.

1 7. The method of Claim 1, wherein said data signal is received from a digital
2 broadcast channel.

1 8. The method of Claim 1, wherein said data signal is display data for a mobile
2 station.

1 9. The method of Claim 1, wherein said data signal is in DVB-T format.

1 10. The method of Claim 1, wherein said data signal is in MP3 format.

1 11. The method of Claim 1, wherein said presenting step uses a video display.

1 12. The method of Claim 1, wherein said presenting step uses an audio output.

1 13. A mobile multimedia terminal, comprising:
2 At least one receiver connected to receive over the air data signals;
3 a controller connected to said receiver to manage and coordinate the
4 functions of said receiver;
5 a display interface connected to said media decoder to optimize said
6 received over the air data signals for display; and
7 a low power radio frequency transceiver connected to said controller to
8 provide an interactive environment with respect to said
9 received over the air data signals.

1 14. The mobile multimedia terminal of Claim 13, further comprising a media
2 decoder connected to said receiver and said controller to decode
3 said received over the air data signals.

1 15. The mobile multimedia terminal of Claim 13, wherein said controller
2 switches the operation of said receiver on and off according to the
3 communications environment.

1 16. The mobile multimedia terminal of Claim 13, further comprising a timing
2 and synchronization connected to said controller and said receiver.

1 17. The mobile multimedia terminal of Claim 13, further comprising a timing
2 and synchronization connected to said controller and said receiver
3 wherein said timing and synchronization manager enables
4 reception of said over the air data signals without resynchronizing
5 said receiver.

1 18.The mobile multimedia terminal of Claim 13, further comprising a display
2 connected to said display interface to display video data.

1 19.The mobile multimedia terminal of Claim 13, further comprising an audio
2 output to present audio data.

1 20.The mobile multimedia terminal of Claim 13, further comprising memory
2 connected to said controller to store said received over the air data
3 signals.

1 21.The mobile multimedia terminal of Claim 13, wherein said over the air data
2 signal is display data for a mobile station.

1 22.The mobile multimedia terminal of Claim 13, further comprising a wireless
2 local area network transceiver connected to said controller to
3 provide interactivity with said received over the air data signals.

1 23.The mobile multimedia terminal of Claim 13, further comprising a mobile
2 station transceiver connected to said controller to provide
3 interactivity with said received over the air data signals.

1 24.The mobile multimedia terminal of Claim 13, further comprising a mobile
2 station transceiver connected to said controller to provide
3 interactivity with said received over the air data signals.

25. The mobile multimedia terminal of Claim 13, further comprising a mobile station transceiver and a wireless local area network transceiver connected to said controller wherein said controller selects one of said transceivers to provide interactivity with said received over the air data signals according to the communications environment.

26. The mobile multimedia terminal of Claim 13, wherein at least one of said receivers is a DVB-T receiver.

1 27. An interactive mobile multimedia terminal system, comprising:
2 a mobile station which communicates data requests;
3 a service provider which receives said data requests and provides data
4 according to said requests;
5 a broadcast operator which receives said data from said service provider
6 and transmits said data over a broadcast channel; and
7 a mobile multimedia terminal which includes,
8 at least one receiver which receives said data;
9 a media decoder connected to said receiver to decode said received
10 data;
11 a controller connected to said receiver and said media decoder to
12 manage and coordinated the functions of said receiver
13 and said media decoder;
14 a display interface connected to said media decoder to optimize
15 said received data for display; and
16 a low power radio frequency transceiver connected to said
17 controller to provide interactivity with said received
18 data and a communications link to said mobile station.

1 28. The interactive mobile multimedia terminal system of Claim 27, wherein
2 said controller switches the operation of said receiver on and off
3 according to the communications environment.

1 29. The interactive mobile multimedia terminal system of Claim 27, further
2 comprising a timing and synchronization connected to said
3 controller and said receiver.

1 30.The interactive mobile multimedia terminal system of Claim 27, further
2 comprising a timing and synchronization connected to said
3 controller and said receiver wherein said timing and
4 synchronization manager enables reception of said over the air
5 data signals without resynchronizing said receiver.

1 31.The interactive mobile multimedia terminal system of Claim 27, further
2 comprising a mobile station transceiver and a wireless local area
3 network transceiver connected to said controller wherein said
4 controller selects one of said transceivers to provide interactivity
5 with said received over the air data signals according to the
6 communications environment.

1 32.The interactive mobile multimedia terminal system of Claim 27, wherein at
2 least one of said receivers is a DVB-T receiver.

1 33.The interactive mobile multimedia terminal system of Claim 27, wherein
2 said over the air data signal is display data for said mobile station.

1 34.The interactive mobile multimedia terminal system of Claim 27, further
2 comprising a media decoder connected to said receiver and said
3 controller to decode said received over the air data signals.

1 35.The interactive mobile multimedia terminal system of Claim 27, further
2 comprising a display connected to said display interface to display
3 video data;.

36. The interactive mobile multimedia terminal system of Claim 27, further a media decoder connected to said receiver and said controller to decode said received over the air data signals.

37. The interactive mobile multimedia terminal system of Claim 27, further comprising audio output to present audio data.

38. The interactive mobile multimedia terminal system of Claim 27, further comprising memory connected to said controller to store said received over the air data signals.

39. The interactive mobile multimedia terminal system of Claim 27, further comprising a wireless local area network transceiver connected to said controller to provide interactivity with said received over the air data signals.

40. The interactive mobile multimedia terminal system of Claim 27, further comprising a mobile station transceiver connected to said controller to provide interactivity with said received over the air data signals.

41. The interactive mobile multimedia terminal system of Claim 27, wherein said mobile station includes a low-power radio frequency transceiver for receiving data from said mobile multimedia terminal.

1 42.The interactive mobile multimedia terminal system of Claim 27, wherein
2 said mobile multimedia terminal transmits data requests to said
3 mobile station.

1 43.The interactive mobile multimedia terminal system of Claim 27, wherein
2 said mobile multimedia terminal transmits data requests to said
3 mobile station using said low-power radio frequency transceiver.

1 44.The interactive mobile multimedia terminal system of Claim 27, wherein
2 said mobile station is integrated into said mobile multimedia
3 terminal.

ABSTRACT

A method and apparatus for providing an interactive mobile multimedia terminal. The mobile multimedia terminal (or MMT) allows for wideband data stream reception using a digital data broadcast receiver such as DVB-T. Interactivity is realized with built-in local or large cell size communications link. The local link could be WLAN or Bluetooth (a low-power RF transceiver). The large cell size communications link could be a mobile station link e.g., GSM, CDMA, TDMA, etc. A mobile station with a Bluetooth link can be used as an IP router or a portable base station for large cell size communication if no local connection point is found. The MMT integrates DVB-T reception, digital display, and communications links together to provide interactivity in a mobile environment. The MMT communications link with a mobile station enables it to act as an extended display for the mobile station. The MMT can also act as a graphical interface for SMS messaging via the mobile station or manipulating other applications on the mobile station.

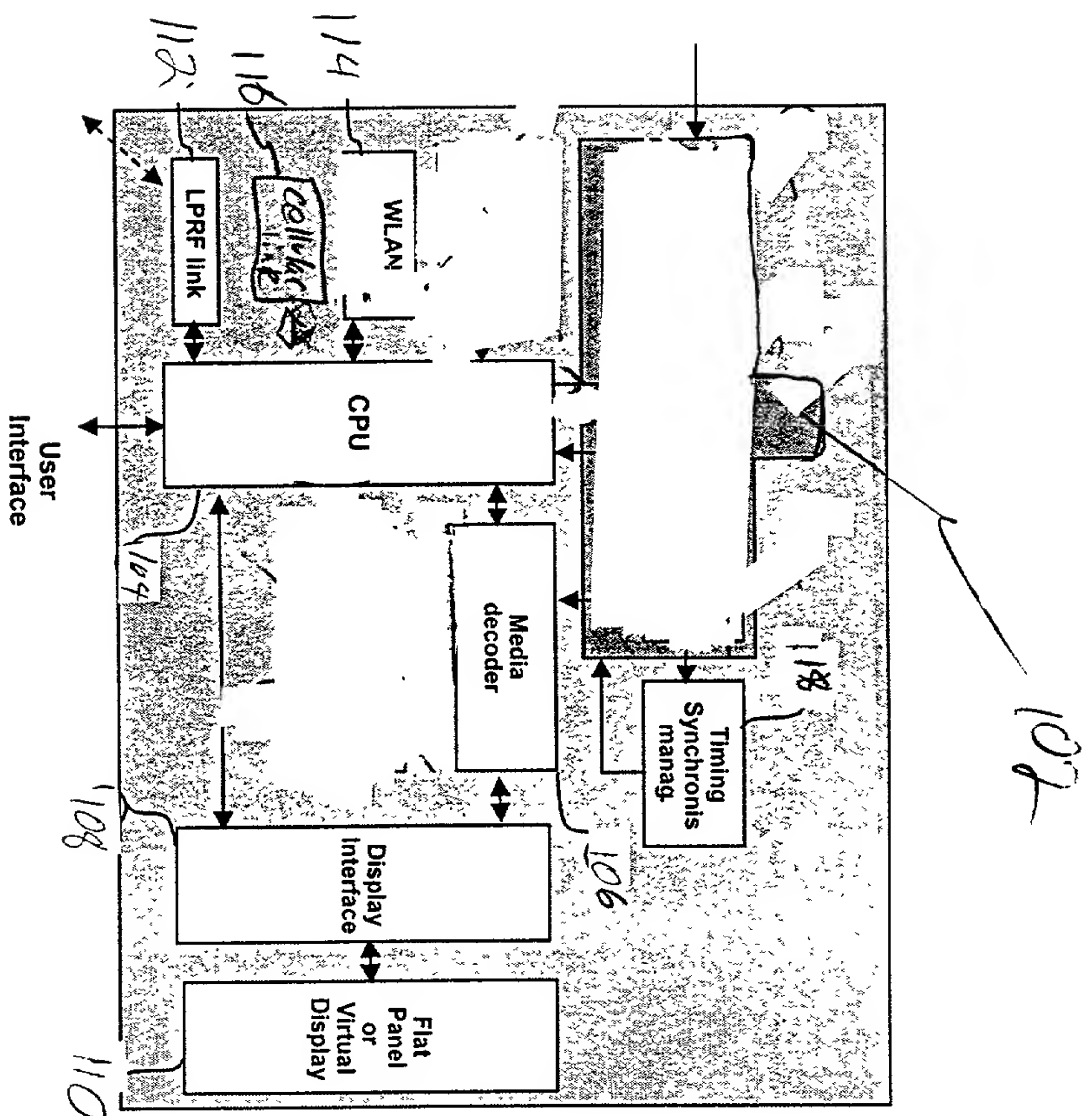
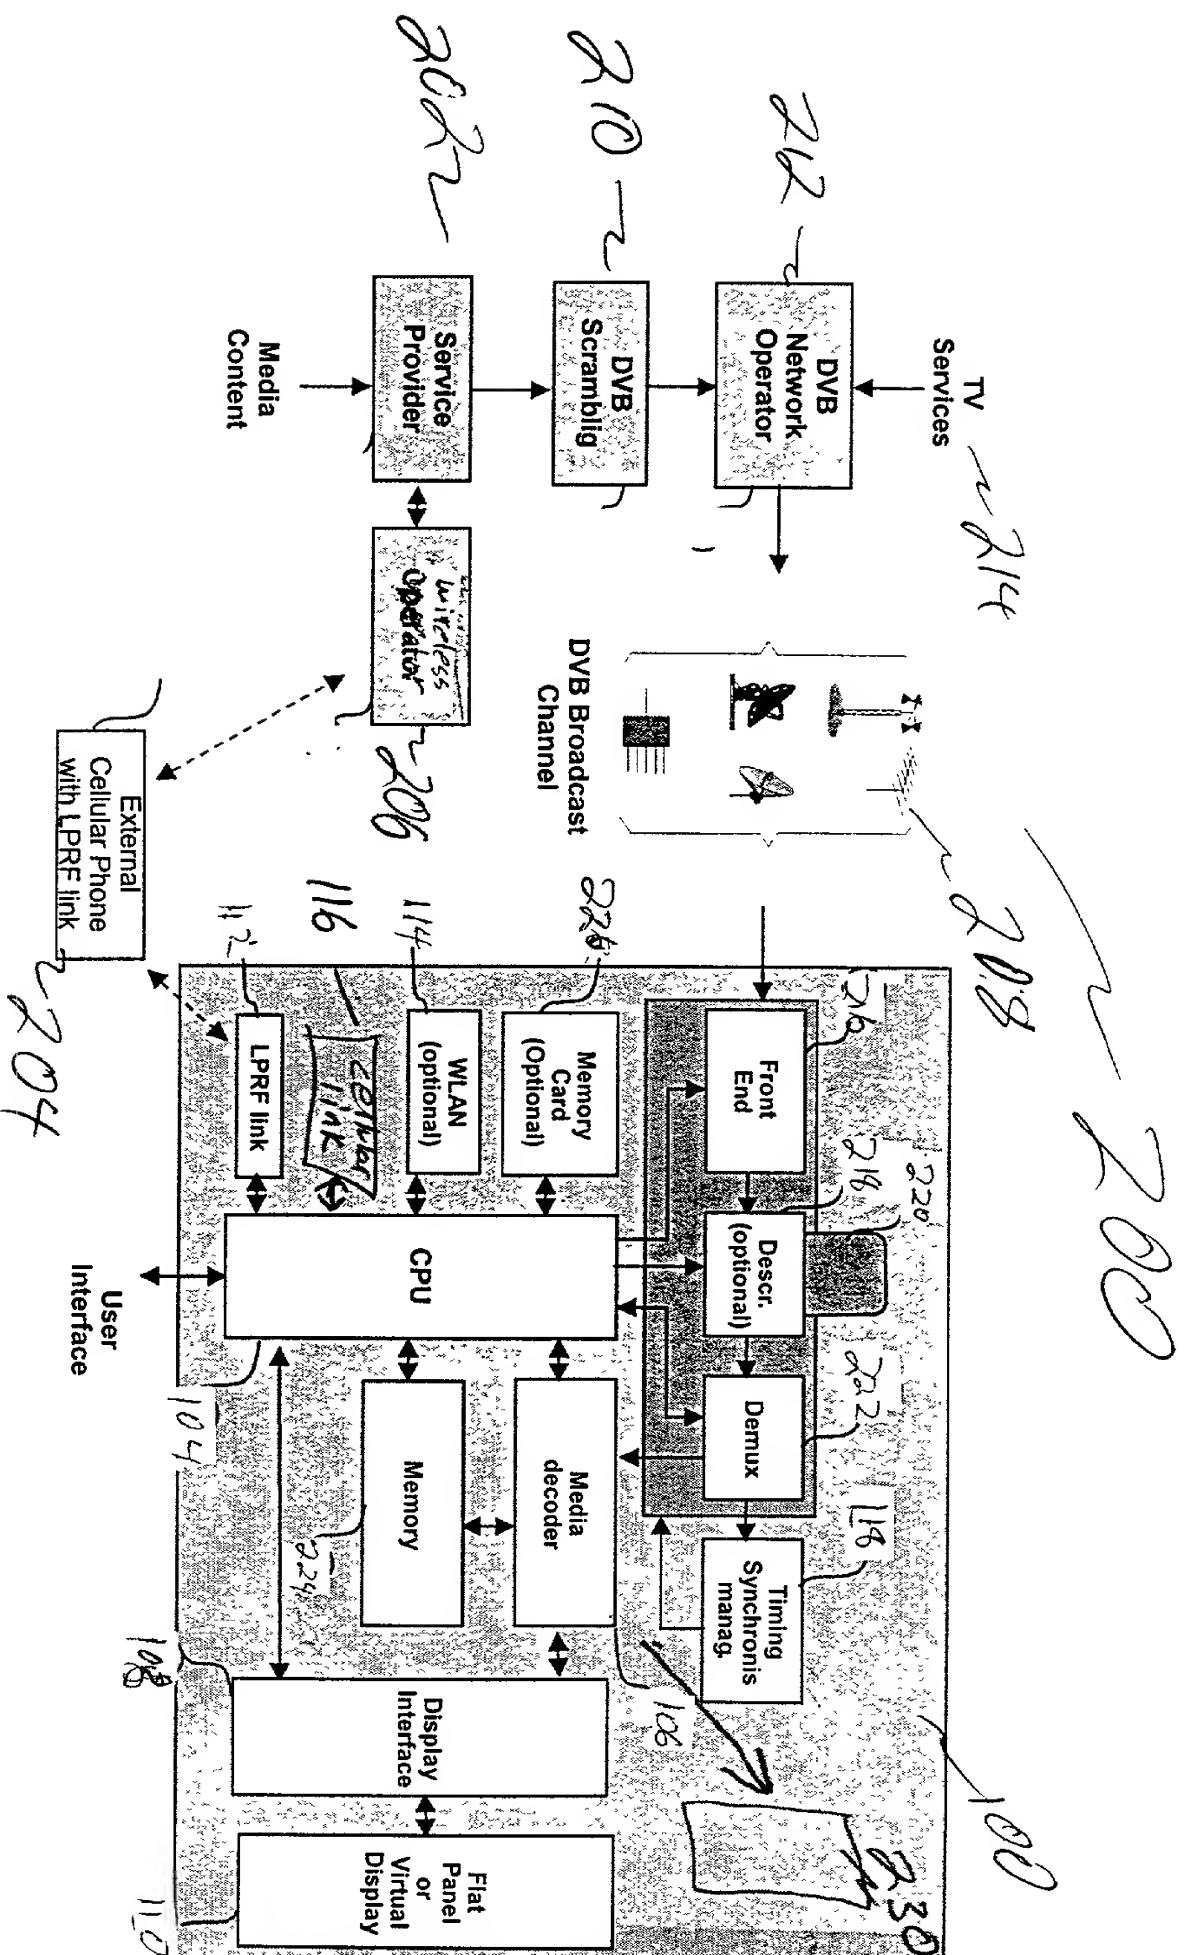


Figure 1



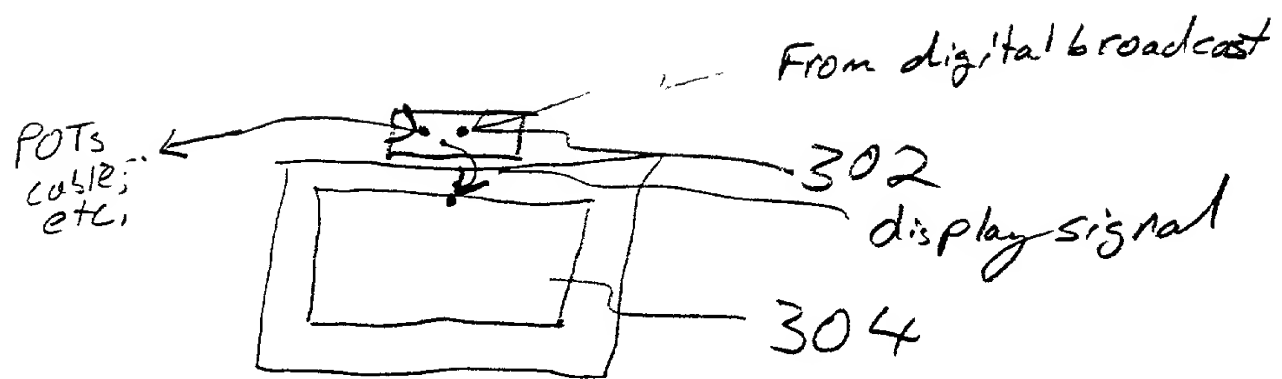


Figure 3
(prior art)

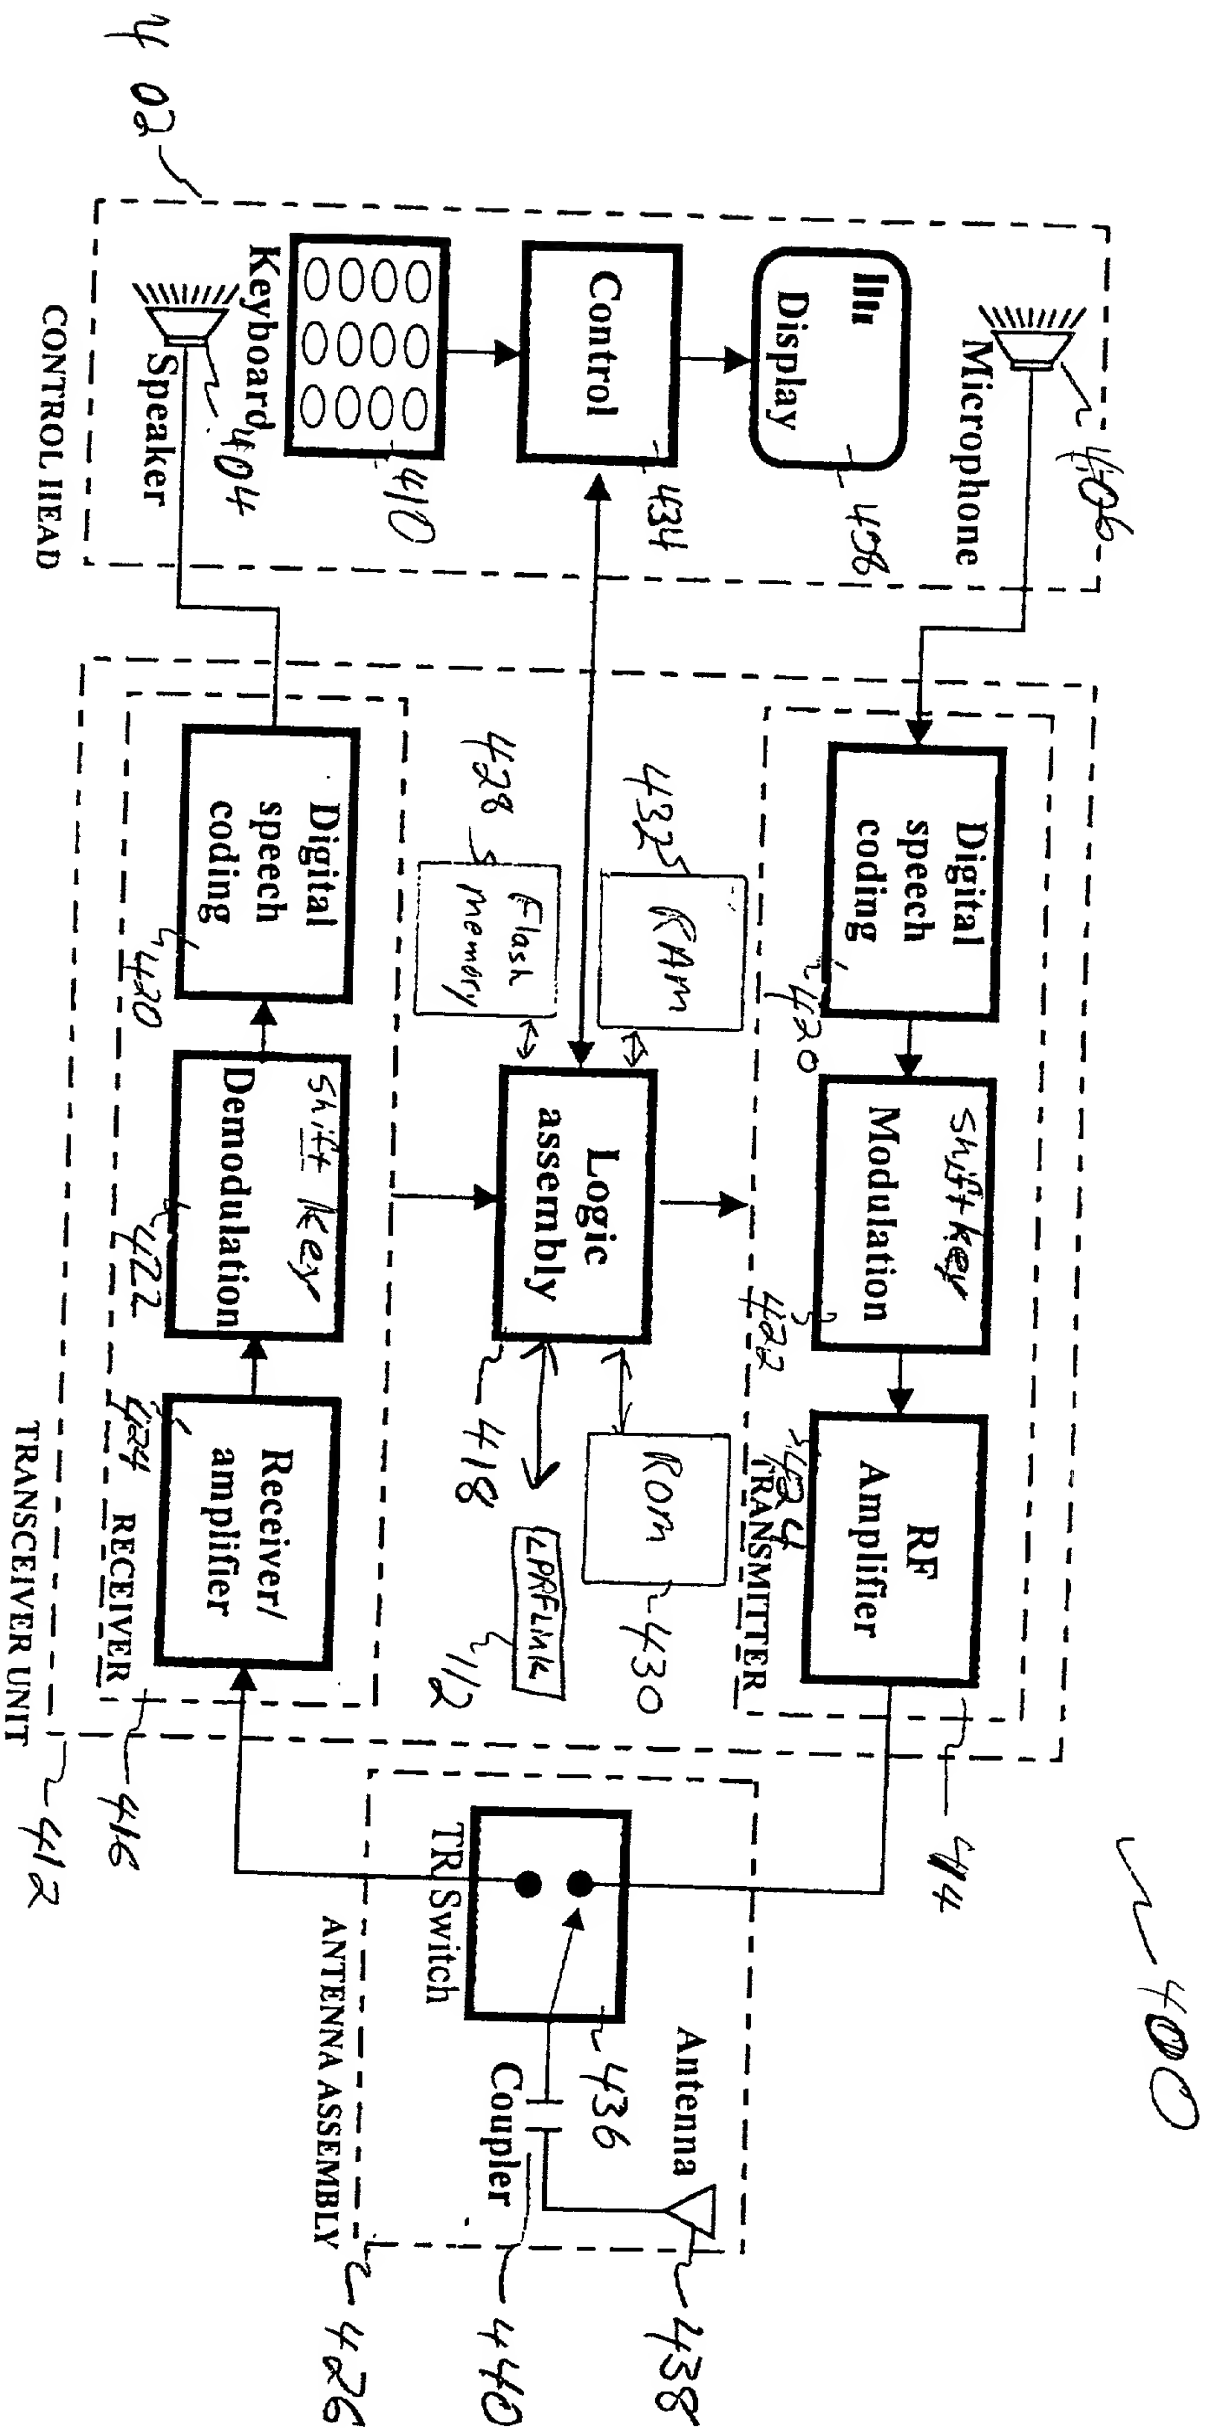


Figure 4